
Box-Type Double-side Metallized Polypropylene film Capacitor(CBB82B) Data Sheet


Feature

- Wide capacitance range from 0.001uF to 0.1uF
- Operating Temperature: -40°C ~ 85°C
- Storage Temperature: 15°C ~ 35°C
- Low loss and small inherent temperature
- Excellent flame resistance
- Negative temperature coefficient of capacitance
- Double sided metallized structure

Applications

- Widely used in high voltage, high frequency pulse circuit
- Electronic ballast and efficient lightbulb


Part Number Code

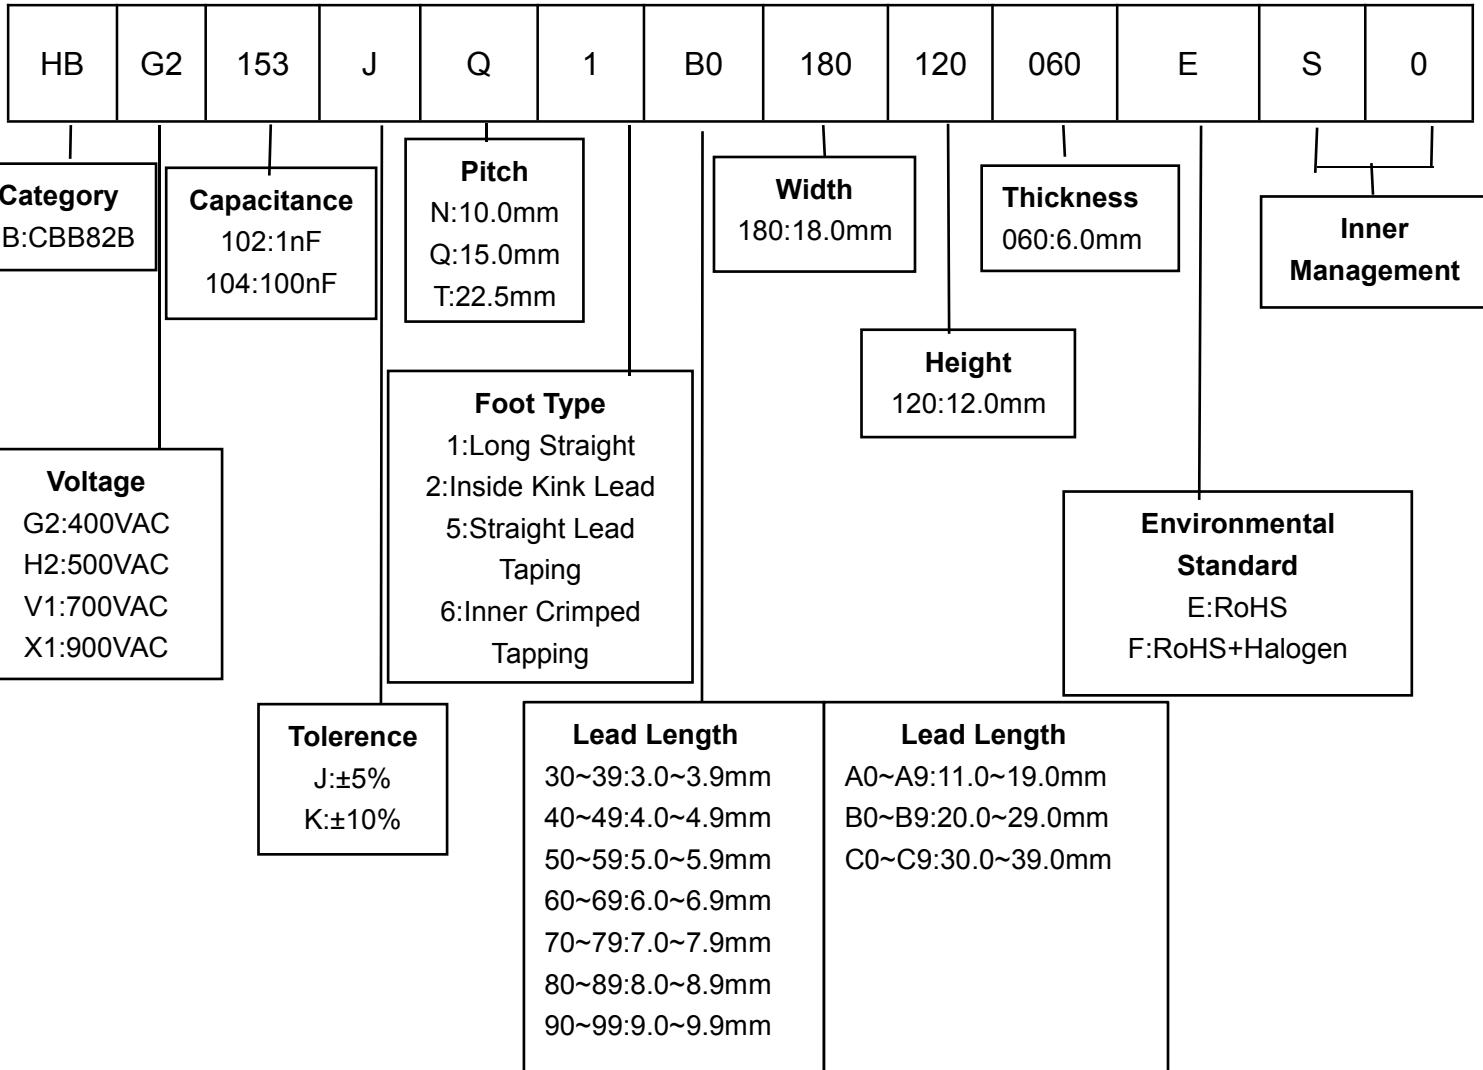

Specifications

Climatic Category	40/100/56
Rated Voltage	400VAC(1000VDC)、500VAC(1200VDC)、 700VAC(1600VDC)、900VAC(2000VDC)
Dissipation Factor (tanδ)	≤0.1%(1KHz、1.0Vrms、20℃)
Withstand Voltage	1.75U _R (5s)
Insulation Resistance (I.R.)	IR≥50000MΩ (AT 100VDC、60SEC、20℃)

Dimensions (mm)


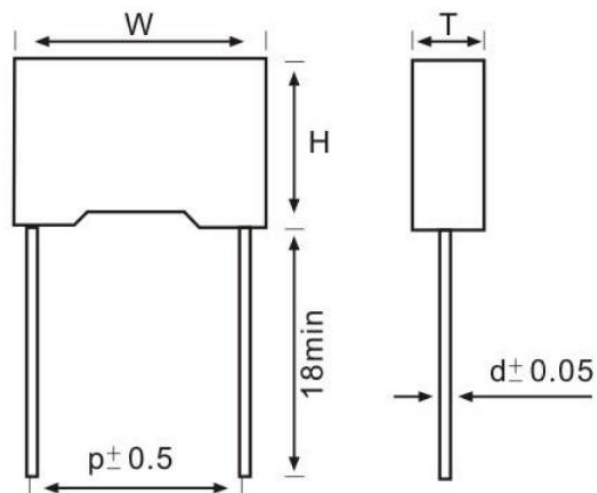


Capacitance (uF)	Rated Voltage	Size (mm)				
		W±0.5	H±0.5	T±0.5	P±1.0	d±0.05
0.001	400VAC	13.0	9.0	4.0	10.0	0.6
	500VAC	18.0	11.0	5.0	15.0	0.8
	700VAC	18.0	11.0	5.0	15.0	0.8
	900VAC	26.0	13.5	6.0	22.5	0.8
0.0012	400VAC	13.0	9.0	4.0	10.0	0.6
	500VAC	18.0	11.0	5.0	15.0	0.8
	700VAC	18.0	11.0	5.0	15.0	0.8
	900VAC	26.0	13.5	6.0	22.5	0.8
0.0015	400VAC	13.0	9.0	4.0	10.0	0.6
	500VAC	18.0	11.0	5.0	15.0	0.8
	700VAC	18.0	11.0	5.0	15.0	0.8
	900VAC	26.0	13.5	6.0	22.5	0.8
0.0018	400VAC	13.0	11.0	5.0	10.0	0.6
	500VAC	18.0	11.0	5.0	15.0	0.8
	700VAC	18.0	11.0	5.0	15.0	0.8
	900VAC	26.0	13.5	6.0	22.5	0.8
0.0022	400VAC	13.0	11.0	5.0	10.0	0.6
	500VAC	18.0	11.0	5.0	15.0	0.8
	700VAC	18.0	11.0	5.0	15.0	0.8
	900VAC	26.0	13.5	6.0	22.5	0.8


Capacitance (uF)	Rated Voltage	Size (mm)				
		W±0.5	H±0.5	T±0.5	P±1.0	d±0.05
0.0027	400VAC	13.0	11.0	5.0	10.0	0.6
	500VAC	18.0	11.0	5.0	15.0	0.8
	700VAC	18.0	12.0	6.0	15.0	0.8
	900VAC	26.0	13.5	6.0	22.5	0.8
0.0033	400VAC	13.0	11.0	5.0	10.0	0.6
	500VAC	18.0	11.0	5.0	15.0	0.8
	700VAC	18.0	12.0	6.0	15.0	0.8
	900VAC	26.0	13.5	6.0	22.5	0.8
0.0039	400VAC	13.0	12.0	6.0	10.0	0.6
	500VAC	18.0	11.0	5.0	15.0	0.8
	700VAC	18.0	13.5	7.5	15.0	0.8
	900VAC	26.0	13.5	6.0	22.5	0.8
0.0047	400VAC	13.0	13.0	7.0	10.0	0.6
	500VAC	18.0	11.0	5.0	15.0	0.8
	700VAC	18.0	13.5	7.5	15.0	0.8
	900VAC	26.0	13.5	6.0	22.5	0.8
0.0056	400VAC	13.0	13.0	7.0	10.0	0.6
	500VAC	18.0	12.0	6.0	15.0	0.8
	700VAC	18.0	13.5	7.5	15.0	0.8
	900VAC	26.0	13.5	6.0	22.5	0.8
0.0068	400VAC	18.0	11.0	5.0	15.0	0.8
	500VAC	18.0	12.0	6.0	15.0	0.8
	700VAC	18.0	14.5	8.5	15.0	0.8
	900VAC	26.0	16.5	7.0	22.5	0.8
0.0082	400VAC	18.0	12.0	6.0	15.0	0.8
	500VAC	18.0	13.5	7.5	15.0	0.8
	700VAC	26.0	15.0	6.0	22.5	0.8
	900VAC	26.0	16.5	7.0	22.5	0.8
0.01	400VAC	18.0	12.0	6.0	15.0	0.8
	500VAC	18.0	13.5	7.5	15.0	0.8
	700VAC	26.0	13.5	7.0	22.5	0.8
	900VAC	26.0	17.0	8.5	22.5	0.8
0.012	400VAC	18.0	12.0	6.0	15.0	0.8
	500VAC	18.0	14.5	8.5	15.0	0.8
	700VAC	26.0	16.5	7.0	22.5	0.8
	900VAC	26.0	19.0	11.0	22.5	0.8

Capacitance (μ F)	Rated Voltage	Size (mm)				
		W \pm 0.5	H \pm 0.5	T \pm 0.5	P \pm 1.0	d \pm 0.05
0.015	400VAC	18.0	13.5	7.5	15.0	0.8
	500VAC	18.0	15.0	9.0	15.0	0.8
	700VAC	26.0	17.0	8.5	22.5	0.8
	900VAC	26.0	19.0	10.0	22.5	0.8
0.018	400VAC	18.0	13.5	7.5	15.0	0.8
	500VAC	26.0	15.0	6.0	22.5	0.8
	700VAC	26.0	19.0	10.0	22.5	0.8
	900VAC	26.0	20.0	10.0	22.5	0.8
0.022	400VAC	18.0	14.5	8.5	15.0	0.8
	500VAC	26.0	16.5	7.0	22.5	0.8
	700VAC	26.0	19.0	10.0	22.5	0.8
0.027	400VAC	18.0	16.5	10.0	15.0	0.8
	500VAC	26.0	17.0	8.5	22.5	0.8
	700VAC	26.0	20.0	11.0	22.5	0.8
0.033	400VAC	26.0	16.5	7.0	22.5	0.8
0.039	400VAC	26.0	16.5	7.0	22.5	0.8
0.047	400VAC	26.0	17.0	8.5	22.5	0.8
0.056	400VAC	26.0	19.0	10.0	22.5	0.8
0.068	400VAC	26.0	19.0	10.0	22.5	0.8
0.082	400VAC	26.0	19.0	10.0	22.5	0.8
0.1	400VAC	26.0	20.0	11.0	22.5	0.8

Lead Configuration

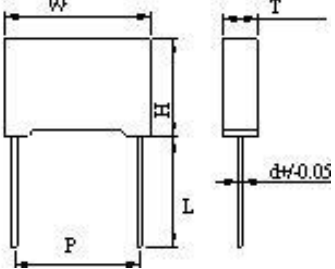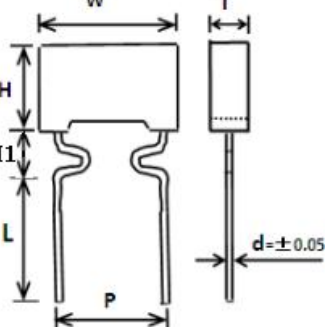Lead Style	Drawing	Lead Length L (mm)	Coating Lead Length H1(mm)
Long Straight		① $[2.5 \leq L < 6.0] \pm 0.5$; ② $[6.0 \leq L \leq 10] \pm 1.0$	/
Inner Crimped		① $[2.5 \leq L < 6.0] \pm 0.5$; ② $[6.0 \leq L \leq 10] \pm 1.0$	Pitch $P > 10\text{mm}$: $H1 < 6.0\text{mm}$ Pitch $P \leq 10\text{mm}$: $H1 < 5.0\text{mm}$

Taping Specification (mm)

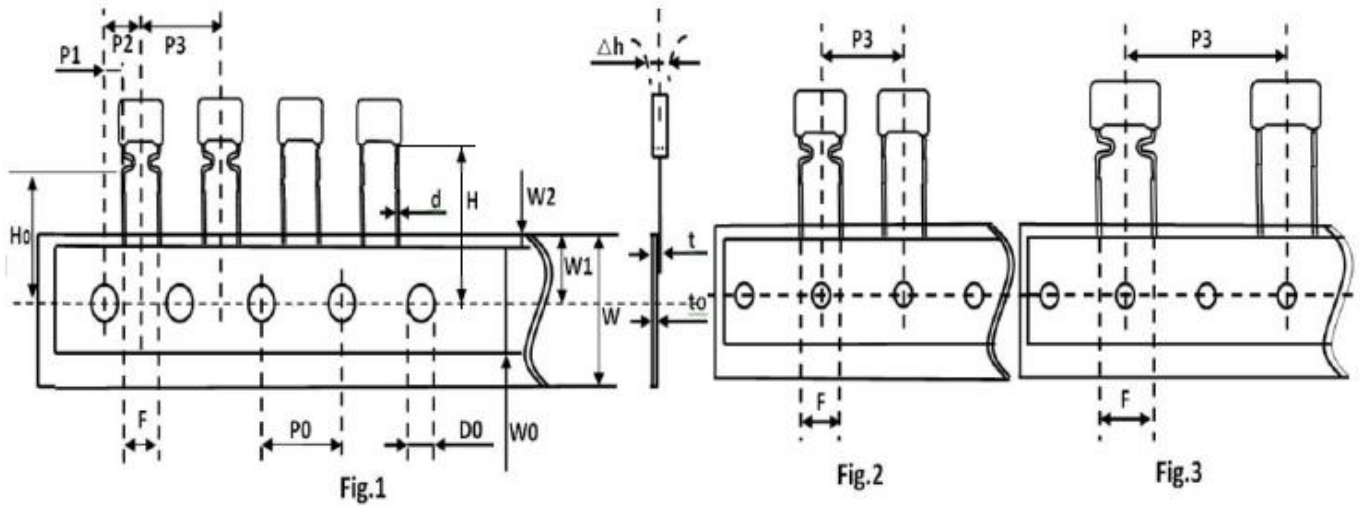

Symbol	Fig.1	Fig.2	Fig.2	Fig.3	Fig.3	Tolerance
	P=5.0	P=7.5	P=10	P=15	P=20/22.5	
P3	12.7	12.7	12.7	25.4	30.0	±1.0
P2	6.35	/	/	/	/	±1.3
P0	12.7	12.7	12.7	12.7	15.0	±0.3
P1	3.85	/	/	/	/	±0.7
F	5.0	7.5	10.0	15.0	20.0/22.5	±1.0
H	20.0	20.0	20.0	20.0	20.0	±1.0
H0	16.5	16.5	16.5	16.5	16.5	±0.5
Δh	0	0	0	0	0	±2.0
W	18.0	18.0	18.0	18.0	18.0	+1.0/-0.5
W0	12.0	12.0	12.0	12.0	12.0	±1.0
W1	9.0	9.0	9.0	9.0	9.0	±0.5
W2	3.0	3.0	3.0	3.0	3.0	Max
D0	4.0	4.0	4.0	4.0	4.0	±0.3
d	0.5	0.6	0.6	0.8	0.8	±0.05
t	1.0	1.1	1.1	1.4	1.4	±0.2
t0	0.38	0.38	0.38	0.47	0.47	±0.04